

**ULTRA-BRIGHT X-RAY GENERATION USING
INVERSE COMPTON SCATTERING OF
PICOSECOND CO₂ LASER PULSES**

A. Tsunemi and A. Endo
R&D Center, Sumitomo Heavy Industries, Ltd.

2-1-1 Yato-cho
Tanashi, Tokyo 188-8585, Japan

I. Pogorelsky, I. Ben-Zvi, K. Kutsche, J. Skaritka and V. Yakimenko
Brookhaven National Laboratory
Upton, New York 11973

T. Hirose
Department of Physics
Tokyo Metropolitan University
1-1 Minami-Osawa, Hachioji, Tokyo 192-0397

J. Urakawa and T. Omori
KEK, 1-1 Oho, Tsukuba, Ibaraki, Japan

M. Washio
Waseda University
1-6-1 Nishi-Waseda, Shinjuku, Tokyo, Japan

Y. Liu, P. He and D. Cline
UCLA
405 Hilgard Avenue, Los Angeles, CA 90095, USA

March 1999

National Synchrotron Light Source

Brookhaven National Laboratory
Operated by
Brookhaven Science Associates
Upton, NY 11973

Under Contract with the United States Department of Energy
Contract Number DE-AC02-98CH10886

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

ULTRA-BRIGHT X-RAY GENERATION USING INVERSE COMPTON SCATTERING OF PICOSECOND CO₂ LASER PULSES

A. Tsunemi*, A. Endo, R&D Center, Sumitomo Heavy Industries, Ltd.

2-1-1 Yato-cho, Tanashi, Tokyo 188-8585, Japan;

I. Pogorelsky**, I. Ben-Zvi, K. Kutsche, J. Skaritka, V. Yakimenko, Brookhaven National
Laboratory, 725C BNL, Upton, NY 11973, USA;

T. Hirose, Department of Physics, Tokyo Metropolitan Univ.,
1-1 Minami-Osawa, Hachioji, Tokyo 192-0397;

J. Urakawa, T. Omori, KEK, 1-1 Oho, Tsukuba, Ibaraki, Japan;

M. Washio, Waseda Univ., 1-6-1 Nishi-Waseda, Shinjuku, Tokyo, Japan;

Y. Liu, P. He, D. Cline, UCLA, 405 Hilgard Ave. Los Angeles, CA 90095, USA

Abstract

Laser-Compton scattering with picosecond CO₂ laser pulses is proposed for generation of high-brightness x-rays. The interaction chamber has been developed and the experiment is scheduled for the generation of the x-rays of 4.7 keV, 10⁷ photons in 10-ps pulse width using 50-MeV, 0.5-nC relativistic electron bunches and 6 GW CO₂ laser.

1 INTRODUCTION

Laser Compton scattering can generate x-rays or γ -rays with high brightness and controlled polarization by applying high-peak-power laser pulses to relativistic electron bunches. We propose to use laser this method for generating circularly polarized γ -rays which, by pair-creation, produce circularly polarized positrons for JLC (Japan Linear Collider) project [1]. In this scheme, a picosecond CO₂ laser will be used as a photon source for Compton scattering. This choice is based on the wavelength proportional increase of laser photon flux per joule of the laser energy, the average power scalability, high wall-plug efficiency, and a capability to the high-repetition rate operation. In general, Compton scattering with CO₂ laser has a promise to become a compact, high-intensity, monochromatic, femtosecond x-ray source for a variety of applications beyond the polarized positron source [2].

We would like to acknowledge Igor Meshkovsky and Andrei Dyublov of Optocl Co. (St Petersburg, Russia) who designed the Compton chamber and proposed and manufactured the target system with oxidized vanadium thin films.

Email:

* akr_tsunemi@shi.co.jp

** igor@bnl.gov

2 EXPERIMENTAL SETUP

We have developed a laser-Compton scattering chamber for the proof-of-principle experiment, in which counter-propagating electron and CO₂ laser pulses collide at the focal point. Fig. 1 shows the conceptual drawing of the Compton chamber to be installed in the linac beamline of the Accelerator Test Facility at Brookhaven National Laboratory. Picosecond CO₂ laser beam is introduced through the side window and focused by an off-axis parabolic Cu mirror of the 50 mm diameter with the focal length of 15 cm. The Cu mirror has 5 mm diameter hole along the electron beam axis to let electrons pass through. An axicon telescope is placed on the CO₂ beam axis just before the Compton chamber. This telescope serves to modify the Gaussian spatial profile of the incident laser beam into the "donut"-shaped profile, as is shown in Fig. 2-(a). This allows the laser radiation to bypass the hole in the focusing parabolic mirror. Fig. 2-(b) represents a numerically calculated CO₂ beam profile at the focal point. The estimated beam waist size is about 100 μ m (FWHM), that corresponds to the electron beam size at the colliding point. Diverging after the focal point the spent laser beam is recollimated by another parabolic Cu mirror and is extracted from the chamber through the output window.

The diagram of the experimental setup is shown in Fig. 3. Picosecond YAG laser pulses are split and delivered to the photo-cathode of the RF gun and for the CO₂ pulse slicing to the 180 ps FWHM by the optical semiconductor optical switching method. The sliced CO₂ pulses are amplified up to 6 GW by the high-pressure TE CO₂ regenerative laser amplifier [3].

Electron bunches with the charge of about 0.5 nC are generated by a photo-cathode RF gun. They are accelerated up to 50 MeV in the RF linac and focused by quadrupole magnets at the center of the chamber.

Since the same mode-locked YAG laser controls both processes of the CO₂ pulse slicing and photo-cathode illumination, the timing jitter between the CO₂ laser and

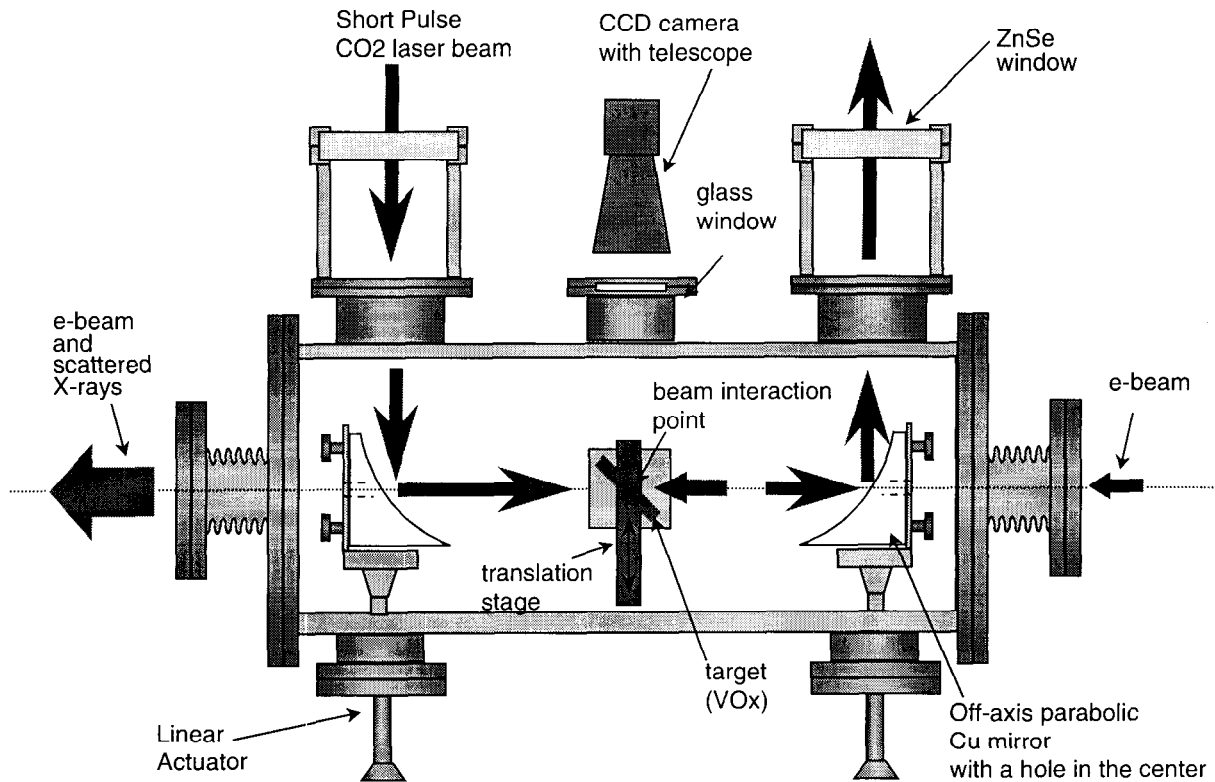


Fig. 1 Top view of the Compton chamber

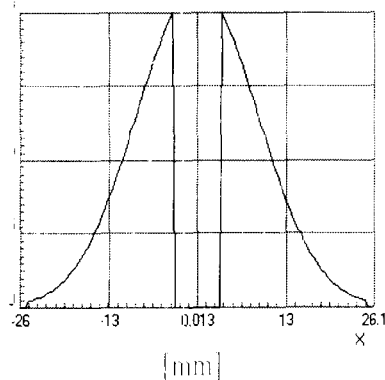


Fig. 2-(a) CO₂ beam profile at the entrance window

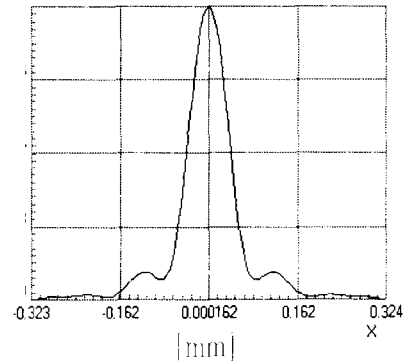


Fig. 2-(b) CO₂ beam profile at the focal point

electron bunches is negligible to compare with the pulse duration.

For fine alignment of the laser and electron beams at the colliding point and the observation of their spatial profiles, we use a target composed of the vanadium oxide thin film coated on a mica substrate. This coating is sensitive to both electron and mid-infrared beams. In the preliminary test with a focused picosecond CO₂ laser pulse, beam profile image was clearly visible as about 100 μm wide blackened spot. The image capture for the mid-infrared beam is physically based on the film reflectivity change in the visible region due to the phase transition in the oxidized vanadium crystal structure heated by the laser beam. Since the reflectivity shows hysteresis nature

in the response to the temperature, the laser spot image can be "grabbed" by maintaining the target temperature around 55°C.

Upon interaction of the 0.5 J laser pulse with the 0.5 nC electron bunch, we expect to observe up to 10^7 of the Compton scattered x-ray photons with the maximum energy of 4.7 keV and the angular divergence of 10 mrad. The x-ray pulse width will be 10 ps, which is approximately the same as the electron bunch length. The scattered x-rays will be detected by a silicon photodiode placed behind the Be window downstream of the dipole magnet that serves to separate electron and x-ray beams.

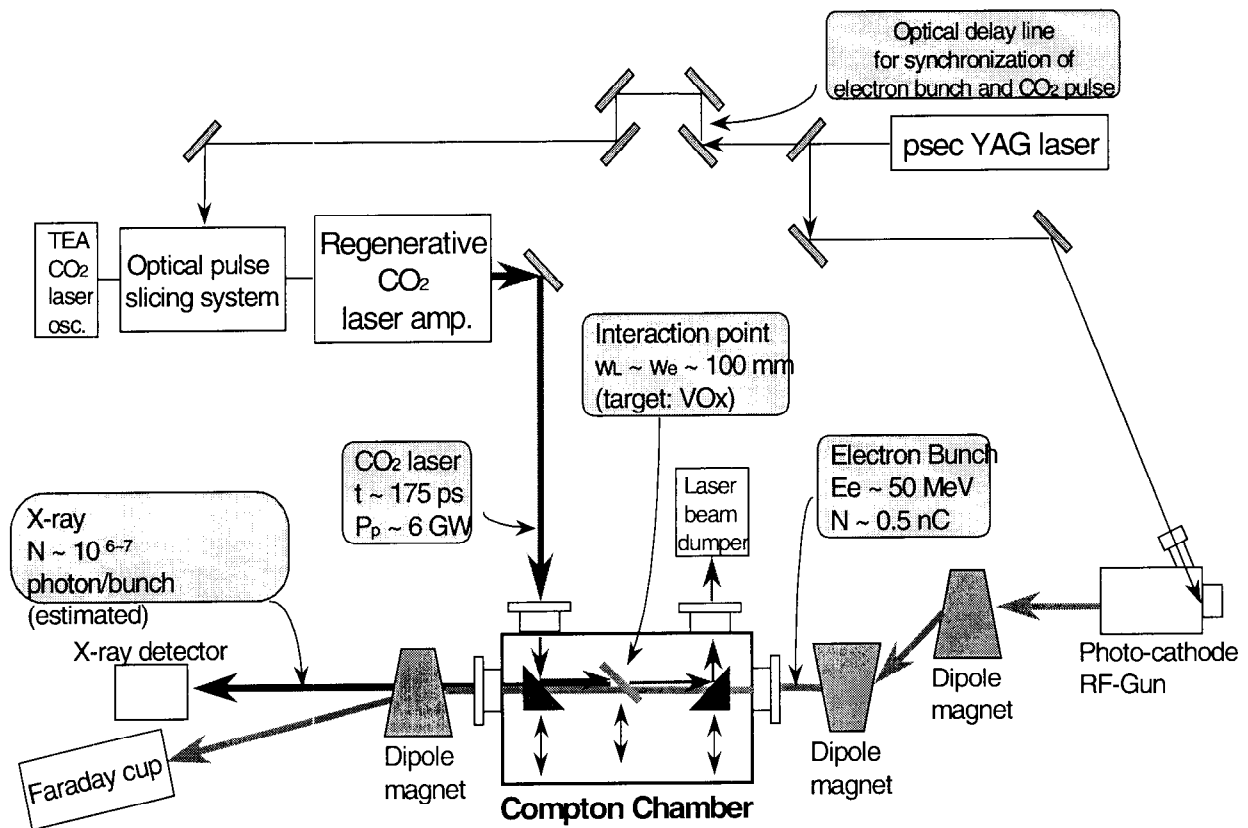


FIG. 3 EXPERIMENTAL

3 SUMMARY

The experiment to observe high-brightness x-ray generation using Compton scattering of the relativistic electron beam with the picosecond CO₂ laser is scheduled at the BNL Accelerator Test Facility.

The laser pulse to be applied to this experiment has about 6 GW peak power and the 180 ps pulse width, which is longer than the laser waist length at the

interaction region. In order to decrease the laser pulse length, multi-step pulse slicing system will be assembled and applied in the future experiments. In addition, 10-atm TE CO₂ power amplifier is planned to be installed to increase the laser peak power up to the 1 TW level.

4 REFERENCES

- [1] T. Okugi et al., Jpn. J. Appl. Phys. 35 (1996) 3677
- [2] I. V. Pogorelsky, Nucl. Instr. & Meth. Res. A 411 (1998) 172
- [3] I. V. Pogorelsky et al., IEEE J. Quantum Electron., 31 (1995) 556